



## COMPACT FLUORESCENT LAMPS

## OSRAM DULUX® D & D/E

✓ **IDEAL FOR** High intensity downlighters



SEE THE WORLD IN A NEW LIGHT





## COMPACT FLUORESCENT LAMPS

### OSRAM DULUX® D & D/E

 **IDEAL FOR** High intensity downlighters

OSRAM DULUX® D are very short double-turn lamps with a 2-pin base and integral starter. They are for operation with conventional control gear.

OSRAM DULUX® D/E is the 4-pin version for operation with high frequency electronic control gear, i.e. OSRAM QUICKTRONIC® QT-D/E.

- Up to 80% energy saving\*
- DULUX® D/E lasts 10 times longer\*
- DULUX® D lasts 8 times longer\*
- Very good colour rendering (Ra 85)

\*compared with conventional light bulbs of similar light output




### TECHNICAL DATA

#### OSRAM DULUX® D

Lamp Wattage (W)	Light Output (lm)	Colour Appearances	Base	Energy Label Classification	$l_1$	$l_2$
10	600	827/830/840	G24d-1(2-pin)	B	87	110
13	900	827/830/840	G24d-1(2-pin)	A	115	138
18	1200	827/830/840	G24d-2(2-pin)	B	130	153
26	1800	827/830/840	G24d-3(2-pin)	B	149	172

#### OSRAM DULUX® D/E

Lamp Wattage (W)	Light Output (lm)	Colour Appearances	Base	Energy Label Classification	$l_1$	$l_2$
10	600	827/830/840	G24q-1(4-pin)	A	87	103
13	900	827/830/840	G24q-1(4-pin)	A	115	131
18	1200	827/830/840	G24q-2(4-pin)	A	130	146
26	1800	827/830/840	G24q-3(4-pin)	B	149	165

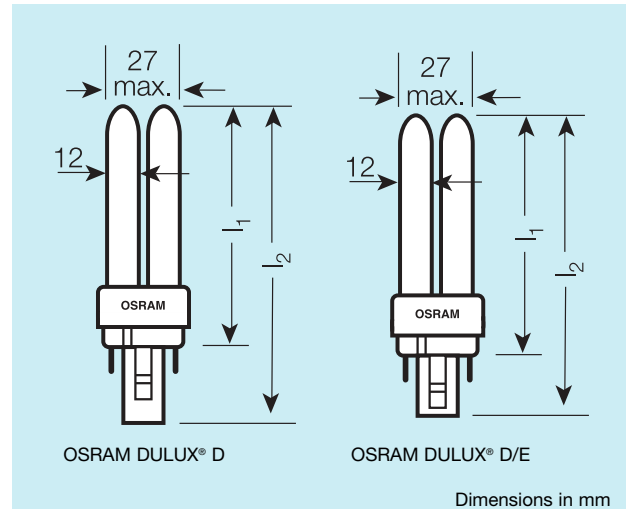

OSRAM Limited, Neills Road, Bold Industrial Park, St. Helens WA9 4XG.  
Tel: 01744 812221. Email: [csc@osram.co.uk](mailto:csc@osram.co.uk)

[www.osram.co.uk](http://www.osram.co.uk)

Wholesaler

SEE THE WORLD IN A NEW LIGHT

**OSRAM**

